


DS-IR728-U

- IP66 Weatherproof rating, dust/rainproof
- Back cover on the back body for better waterproof
- Cable management design

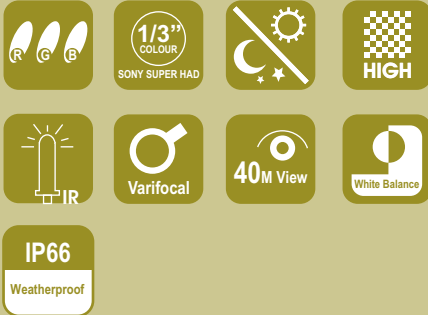

Specifications

Model Number	DS-IR728-U
Pickup Device	1/3" Sony Super HAD CCD
Effective Pixels	PAL: 752(H) x 582(V); NTSC: 768(H) x 494(V)
Horizontal Resolution	540 TVL
Infrared LED	48 LEDs
Infrared LED Range	35m~40m
S/N Ratio	48dB
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	Up to 1/100,000 sec.
Back Light Compensation	Auto
Video Output	1 Vp-p, 750Composite, BNC x 1
Gamma Ratio	0.45
Lens	4~9mm Vari-focal, manual iris
Lens Mount	M12 x P0.5mm Thread
Power Supply	12V DC \pm 10%, 2.0mm DC Jack x 1
Power Consumption	410mA
Dimension	94mm x 186mm (D*L with sun-shield)
Net Weight	1300g
Weatherproof/Water Proof	IP66
Operating Temperature	-10°C to +50°C